











# SFP-MRC-CII-100M

## 10/100/1000 BASE-T Copper SFP Transceiver

### PRODUCT FEATURES

-  Up to 1.25 Gb/s bi-directional data links
-  Hot-pluggable SFP footprint
-  Low power dissipation (1.05W typical)
-  Compact RJ-45 connector assembly
-  Fully metal enclosure, for lower EMI
-  RoHS compliant and lead-free
-  Single +3.3V power supply
-  10/100/1000 BASE-T operation in host systems with SGMII interface
-  1.25 Gigabit Ethernet over Cat 5 cable
-  Case operating temperature : Commercial: 0°C to +70°C  
Industrial: -40°C to +85°C



### PRODUCT DESCRIPTION

Cloudtronic SFP-MRC-CII-100M 10/100/1000 BASE-T Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA). They are compatible with the Gigabit Ethernet standards as specified in IEEE Std 802.3. The 10/100/1000 BASE-T physical layer IC (PHY) can be accessed via I2C, allowing access to all PHY settings and features.

The SFP-MRC-CII-100M is compatible with 1000BASE-X auto-negotiation but does not have a link indication feature (RX\_LOS is internally grounded).

#### I. SFP to Host Connector Pin Out

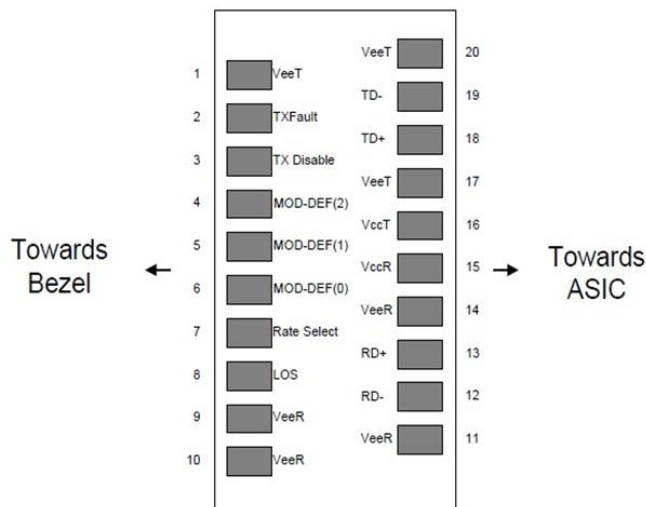


Figure 1. Diagram of host board connector block pin numbers and names

Pin	Symbol	Name/description	Note
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Not supported.	
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	2
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	2
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	2
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	3
9	VEER	Receiver Ground (Common with Transmitter Ground)	1
10	VEER	Receiver Ground (Common with Transmitter Ground)	1
11	VEER	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	1

Note:

1. Circuit ground is connected to chassis ground
2. Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
3. LVTTTL compatible with a maximum voltage of 2.5V. Not supported on SFP-MRC-CII-100M

## II. 3.3V Volt Electrical Power Interface

The SFP-MRC-CII-100M has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

+3.3 Volt Electrical Power Interface						
Parameter	Symbol	Min	Typ	Max	Unit	Note/Condition
Supply Current	Is		320	375	mA	1.2W max power over full range of voltage and temperature. See caution note below
Input Voltage	Vcc	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	Vmax			4	V	
Surge Current	Isurge			30	mA	Hot plug above steady state current. See caution note below

Caution: Power consumption and surge current are higher than the specified values in the SFP MSA

<b>Head Office and R&amp;D Lab</b> Unit 1 / 6 Powells Road Brookvale, Sydney NSW 2100 AUSTRALIA	<b>Melbourne Office</b> 11 Corporate Drive Cranbourne West VIC 3977 AUSTRALIA	<b>USA R&amp;D Lab</b> 48233 Warm Springs Blvd. Fremont CA	<b>Indonesia Office</b> West Park B-23 JL. Blvd. Barat BSD City Pagedangan, Tangerang Banten 15336
--	--	--	--

### III. Low-Speed Signals

MOD\_DEF(1) (SCL) and MOD\_DEF(2) (SDA), are open drain CMOS signals (see section VII, "Serial Communication Protocol"). Both MOD\_DEF(1) and MOD\_DEF(2) must be pulled up to host\_Vcc

Low-Speed Signals, Electronic Characteristics					
Parameter	Symbol	Min	Max	Unit	Note/Condition
<b>SFP Output LOW</b>	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
<b>SFP Output HIGH</b>	VOH	host_Vcc - 0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
<b>SFP Input LOW</b>	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
<b>SFP Input HIGH</b>	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector

### IV. High-Speed Electrical Interface

All high-speed signals are AC-coupled internally.

High-Speed Electrical Interface, Transmission Line-SFP				
Parameter	Symbol	Typ	Unit	Note/Condition
<b>Line Frequency</b>	fL	125	MHz	5-level encoding, per IEEE 802.3
<b>Tx Output Impedance</b>	Zout,TX	100	Ohm	Differential, for all frequencies between 1MHz and 125MHz
<b>Rx Input Impedance</b>	Zin,RX	100	Ohm	Differential, for all frequencies between 1MHz and 125MHz

High-Speed Electrical Interface, Host-SFP						
Parameter	Symbol	Min	Typ	Max	Unit	Note/Condition
<b>Single ended data input swing</b>	Vinsing	250		1200	mV	Single ended
<b>Single ended data output swing</b>	Voutsing	350		800	mV	Single ended
<b>Rise/Fall Time</b>	T <sub>r</sub> ,T <sub>f</sub>		175		psec	20%-80%
<b>Tx Input Impedance</b>	Zin		50		Ohm	Single ended
<b>Rx Output Impedance</b>	Zout		50		Ohm	Single ended

## V. General Specification

General						
Parameter	Symbol	Min	Typ	Max	Unit	Note/Condition
Data Rate	BR	10		1000	Mb/sec	IEEE 802.3 compatible. See Notes 2 through to 4 below
Cable Length	L			100	m	Category 5 UTP. BER

Note:

1. Clock tolerance is +/- 50 ppm
2. By default, the SFP-MRC-CII-100M is a full duplex device in preferred master mode
3. Automatic crossover detection is enabled. External crossover cable is not required  
10/100/1000 BASE-T operation requires the host system to have an SGMII interface with no clocks.

## VI. Environmental Specification

Environmental Specifications						
Parameter	Symbol	Min	Typ	Max	Unit	Note/Condition
Case Operating Temperature	Tcase	0		70	°C	SFP-MRC-CII-100M
		-40		85	°C	SFP-MRC-CII-100M-I
Storage Temperature	Tsto	-40		85	°C	Ambient temperature


## VII. Serial Communication Protocol

SFP-SGMII-? support the 2-wire serial communication protocol outlined in the SFP MSA.

It uses an Atmel AT24C02B 256 byte EEPROM with an address of A0h.

Serial Bus Timing Requirements			
Parameter	Min	Max	Unit
I2C Clock Rate	0	100,000	Hz

## VIII. Mechanical Specifications (Unit: mm)

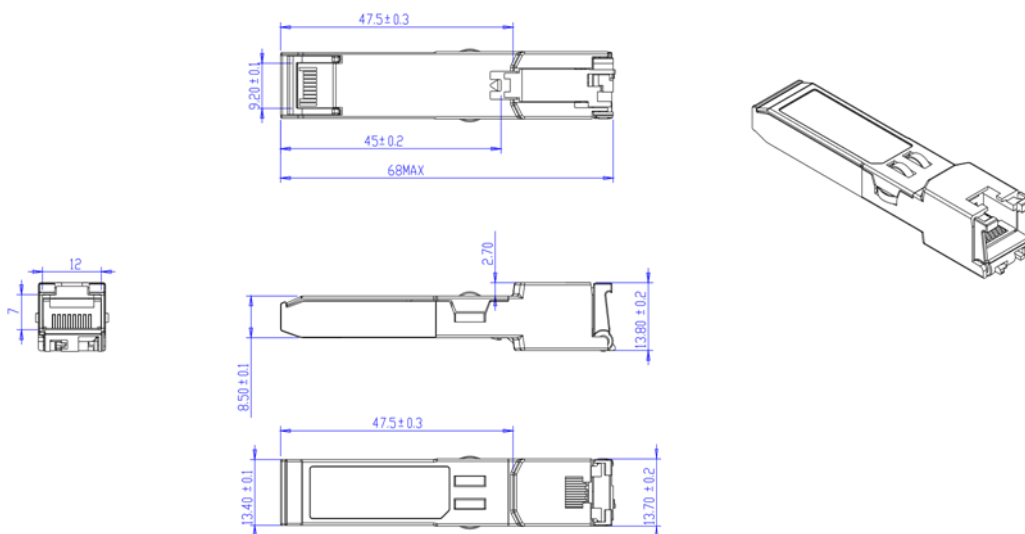

Head Office and R&D Lab  
Unit 1 / 6 Powells Road  
Brookvale, Sydney NSW 2100  
AUSTRALIA

Melbourne Office  
11 Corporate Drive  
Cranbourne West VIC 3977  
AUSTRALIA

USA R&D Lab  
48233 Warm Springs Blvd.  
Fremont CA

Indonesia Office  
West Park B-23  
JL. Blvd. Barat BSD City  
Pagedangan, Tangerang  
Banten 15336